

Bulkhead fittings & couplings

for pneumatic hoses 4-12 mm



The bulkhead fittings & couplings for pneumatic hoses are also available individually, e.g. for use with the [AT-K-M](#) and [QT-AT-K-M adapter grommets](#).

This means that pneumatic bulkhead couplings M12 × 1.0 and M14 × 1.0 can be integrated directly into the cable entry frame.

Specifications


Material	Brass, nickel-plated
Flame class	UL94-V0, self-extinguishing
Operating temperature	-40 C° to 100 C°
Properties	silicone free, halogen free
Mounting options	Screw type mounting

Advantages & Benefits

- By utilising the adapter grommets AT-K-M, pneumatic bulkhead fittings & couplings can be integrated directly into the cable entry frame
- Separate cut-outs are no longer necessary
- Space-saving solution


Product Types & Sizes

Bulkhead coupling D4

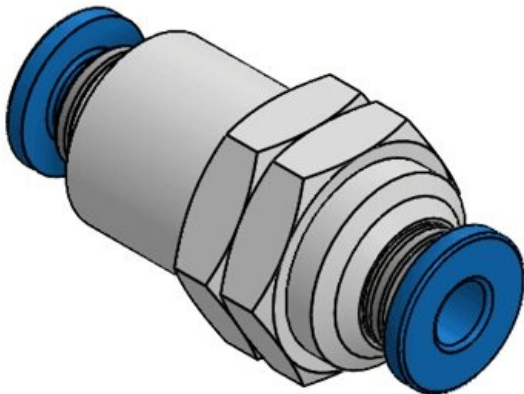


Part No.	99210
EAN	4251269325601
Package quantity	10
Thread	M12 × 1,0
Length	30,8 mm
For pneumatic hose	4 mm

Bulkhead coupling D6

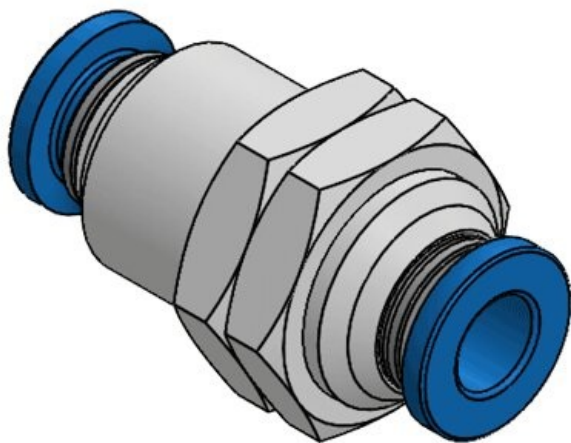


Part No.	99211
EAN	4251269325618
Package quantity	10
Thread	M14 × 1,0
Length	32,3 mm
For pneumatic hose	6 mm

Bulkhead fitting D8

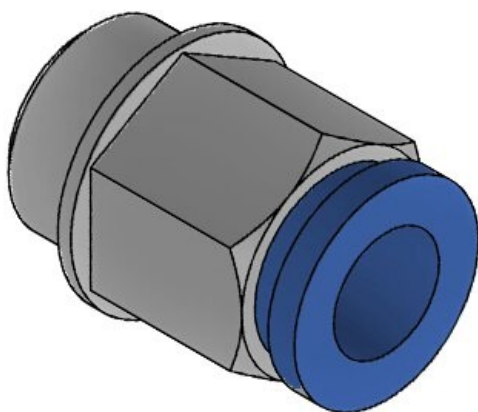


Part No.	99227
EAN	4251269332012
Package quantity	10
Thread	1/4"
Length	23 mm
For pneumatic hose	8 mm

Bulkhead fitting D10

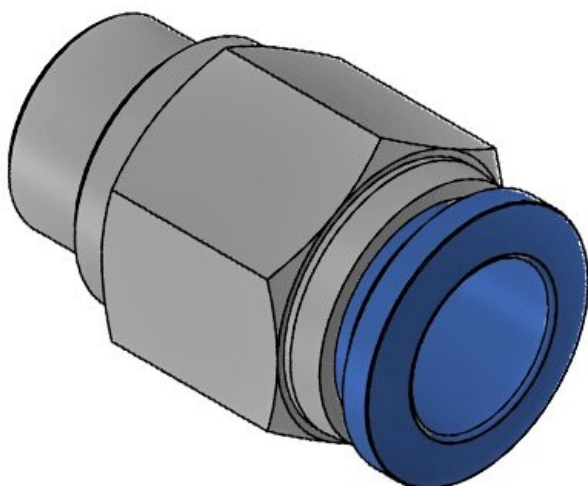

Part No.	99228
EAN	4251269332029
Package quantity	10
Thread	1/4"
Length	29,5 mm
For pneumatic hose	10 mm

Bulkhead fitting D12

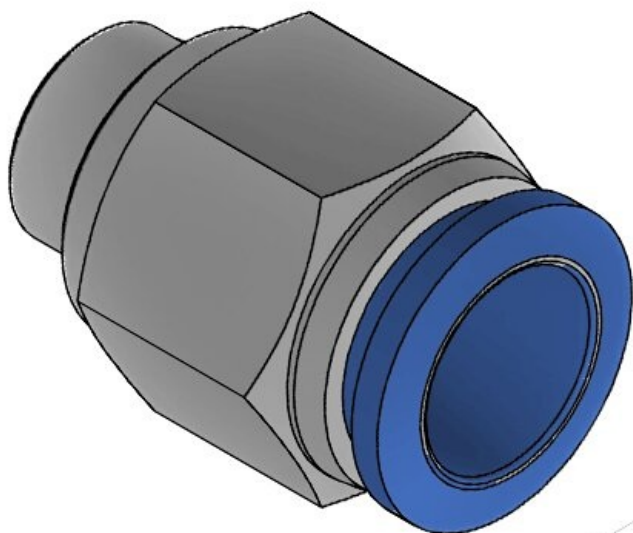

Part No.	99229
EAN	4251269332
	036
Package quantity	10
Thread	1/4"
Length	31,5 mm
For pneumatic hose	12 mm

icotek[®]
smart cable management