

Schotkoppelingen

voor pneumatische slangen 4-12 mm



The bulkhead fittings & couplings for pneumatic hoses are also available individually, e.g. for use with the [AT-K-M](#) and [QT-AT-K-M adapter grommets](#).

This means that pneumatic bulkhead couplings M12 × 1.0 and M14 × 1.0 can be integrated directly into the cable entry frame.


Specificaties

Materiaal	Messing, vernikkeld
Vlam klasse	UL94-V0, zelfdovend
Temperatuur	-40 C° tot 100 C°
Eigenschappen	zonder siliconen, halogeenvrij
Montage type	Schroefbevestiging

Voordelen


Producttypes en maten

Schotkoppeling D4

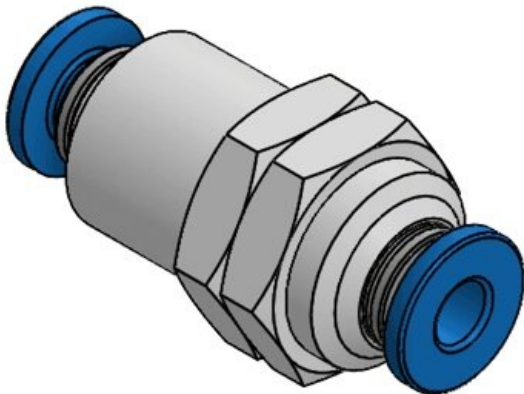


Art.nr.	99210
EAN	4251269325601
Aantal	10
Schroefdraad	M12 × 1,0
Lengte	30,8 mm
Voor	4 mm
pneumatische slang	

Schotkoppeling D6

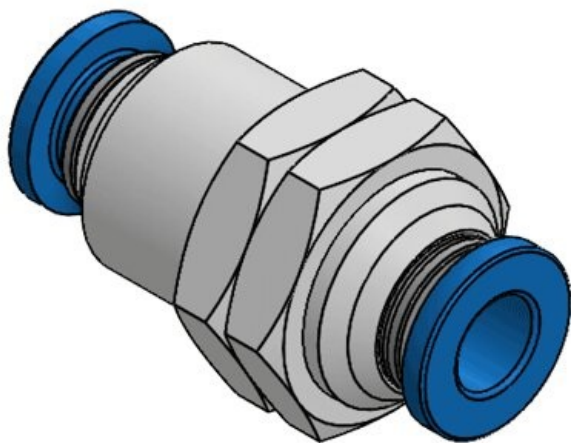


Art.nr. **99211**
EAN **4251269325618**
Aantal **10**
Schroefdraad **M14 × 1,0**
Lengte **32,3 mm**
Voor **6 mm**
pneumatische
slang

Schotkoppeling D8

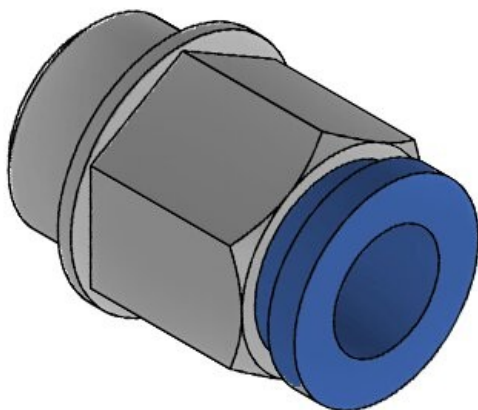


Art.nr. **99227**
EAN **4251269332012**
Aantal **10**
Schroefdraad **1/4"**
Lengte **23 mm**
Voor **8 mm**
pneumatische
slang

Schotkoppeling D10

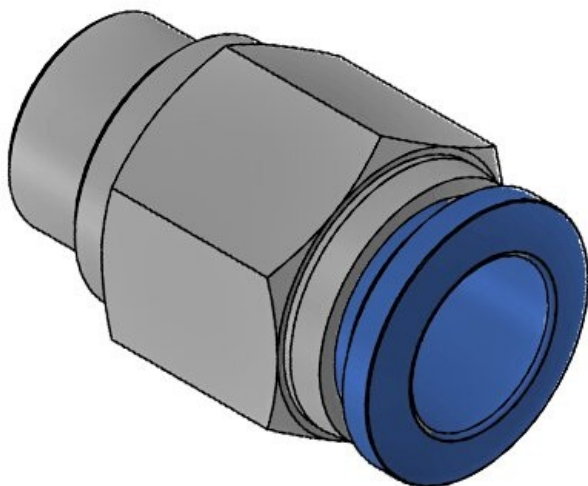

Art.nr. **99228**
EAN **4251269332029**
Aantal **10**
Schroefdraad **1/4"**
Lengte **29,5 mm**
Voor **10 mm**
pneumatische
slang

Schotkoppeling D12

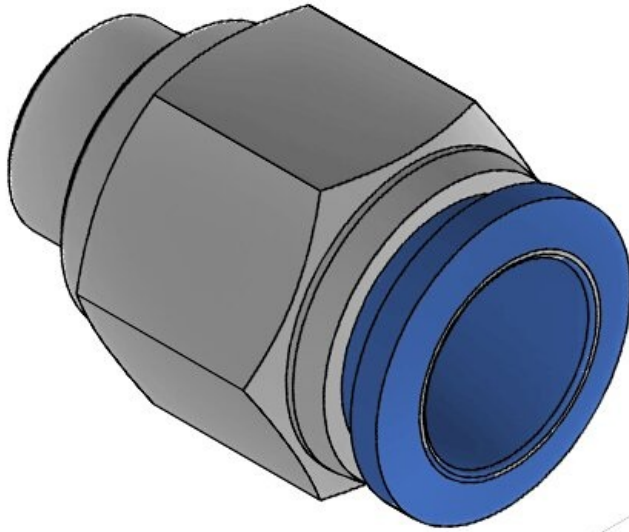

Art.nr.	99229
EAN	4251269332
	036
Aantal	10
Schroefdraad	1/4"
Lengte	31,5 mm
Voor	12 mm
pneumatische slang	

icotek[®]
smart cable management